
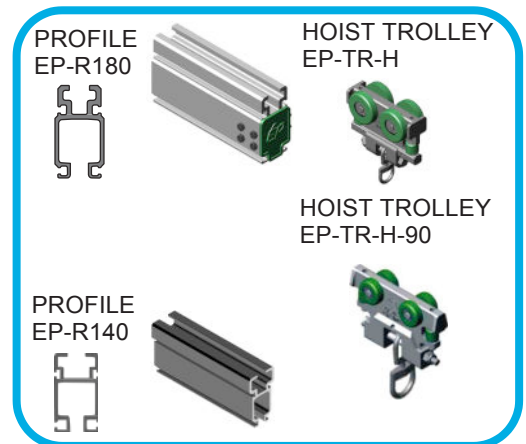
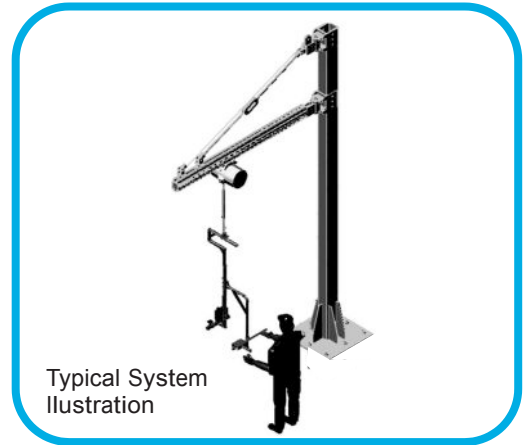


The Jib Arm works to cover small areas where is not access with rail system, its arm lengths of 4 to 20 feet rotates up to 220 degrees and 360 degrees, counts with an Ergonomic Aluminum Rail ErgoProSys. Includes the assembly cart for the balancer.

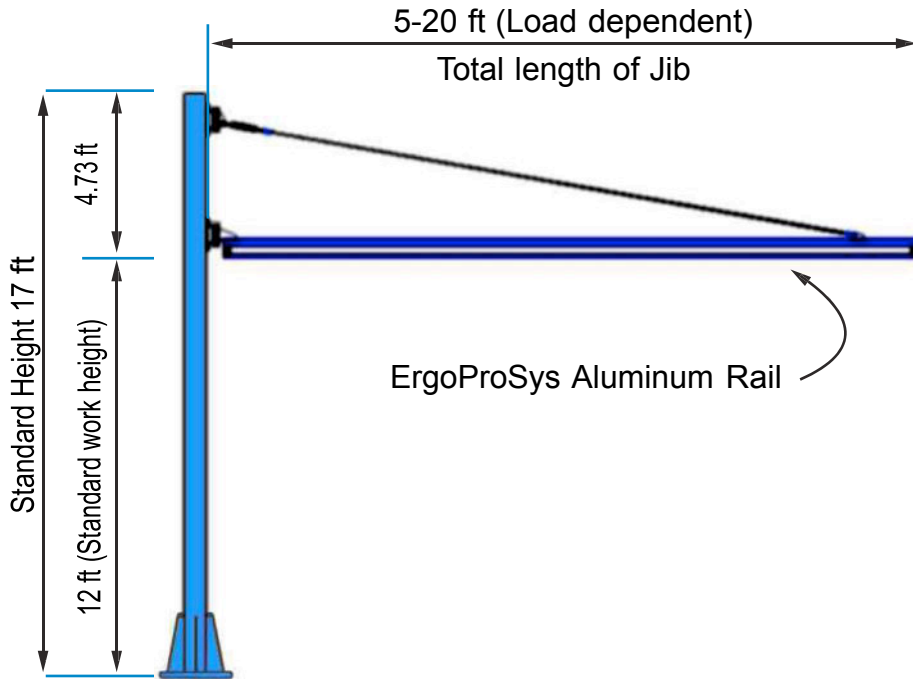

JIB ARM MODEL NUMBER CONFIGURATION

AJX-XXXX-XX22-15

Erg. AJM-1000-6-22-15

- Over all column height (17 ft standard)
- Swing (220° or 360°)
- Boom Length (5-20 feet)
- Load Capacity (600-2000 lbs)
- Service Type
 - L-Light duty
 - M-Medium duty
 - H-Heavy duty
- Jib
- Arm

Note:

- Please submit an application sheet, always.
- The articulated Jib Arm AJ has a pedestal with a standard 17 ft, height.
- Hoist trolley is included.
- Festoon trolleys optional.

AIR HOSE SUPPLY KIT (OPTIONAL)

The air supply kit is available in 3/8" and 1/2" hose/diameters and in lengths up to 50 ft. The air supply kit is available for runway, monorail and bridge cranes. These kits come complete with the necessary coil hose, brackets, coated cable, tag lines, tensioners required to supply air to the rail system.

Air Hose Supply Kit: Regulator, Brackets (2), Tag Line, Coil Hose (40 ft.) Turn Buckles (2) and fitting, (1/4) turn ball valve.

